



What makes the OCXO-3 Different ?

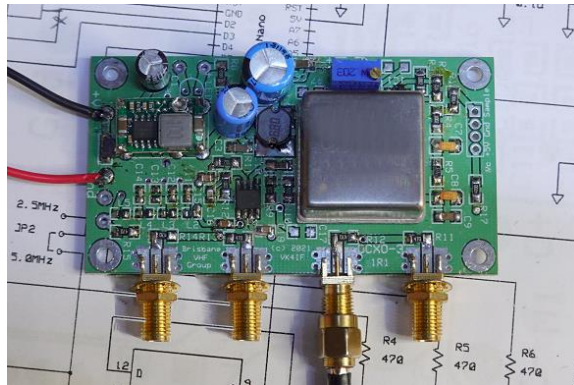

- **Low cost**
- **High Stability < 10ppb**
- **Fast Warm-up OCXO less than 5min**
- **Outputs > +6 dBm Other levels and fifth output available as option**
- **Sine Square as option**
- **Wide range power supply 12 to 28 Vdc**
- **Low power startup <500mA @12V <300mA @26V**
- **Low power Consumption <150mA @12V <250mA @26V**
- **Calibrated at manufacture to GPS disciplined standard < 5ppb**
- **LED status indicators for Power**
- **Bare module or diecast aluminium shielded enclosure**

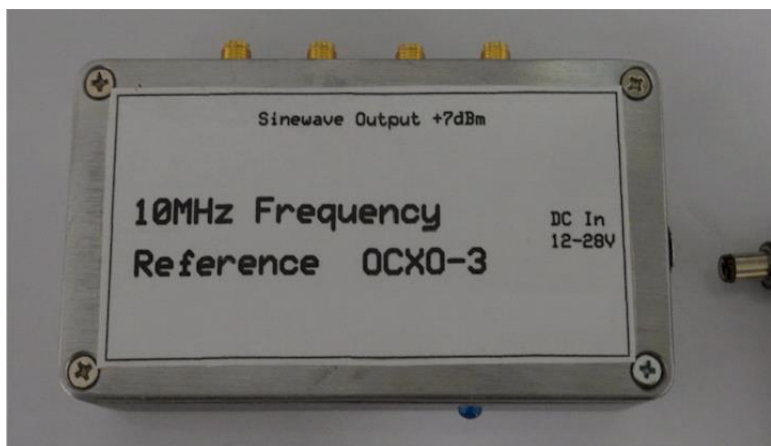

VK4AMG@wia.org.au