

The DAMP-03 module, a member of the Brisbane VHF Group 10MHz Reference family provides distribution of one 10MHz Reference to up to five outputs.


The module, a linear unity gain amplifier, provides four 10MHz outputs up to +10dBm.

The input may be sine or square wave. A low pass filter provides sine wave to all outputs.

Power supply is 11 to 28V dc at less than 50mA.

Four outputs are provided along one edge of the module PCB and may be fitted with SMA connectors. The input and an optional 5th output is available on the other edge of the PCB. SMA connectors may be fitted to this edge or SMA fly leads may be used when the board is fitted into an enclosure.

The module is available as a PCB module. An aluminium clamshell enclosure with screw-on aluminium end plates 80 x 50 x 20 mm is available as an option.

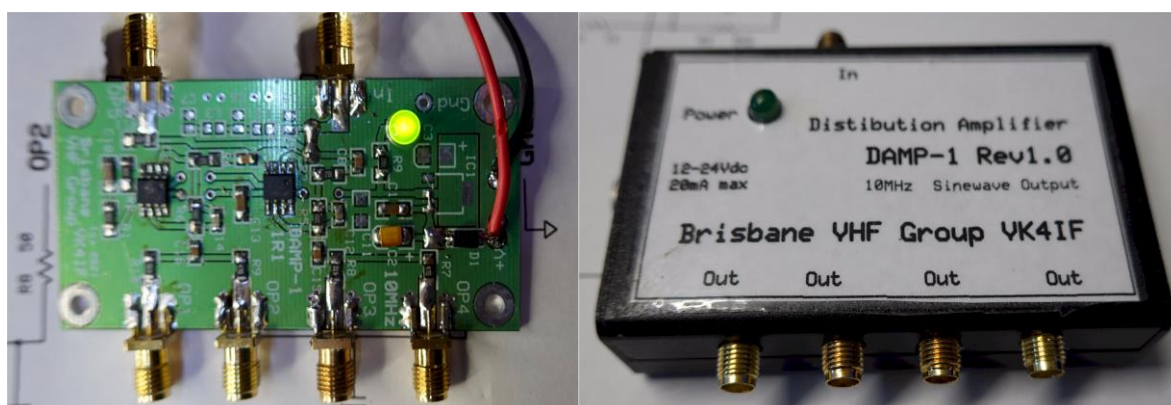

Specification

Frequency	10	MHz	
Waveform	Sine		Square or sine input
	Square (Option)		Square wave input
Number of Outputs	4		SMA
	+1		Fly lead or SMA
Gain	Unity		Typically > 0.95
Output level	+10 dBm		10dBm input
Power Supply	12 - 28	Vdc	
Consumption	20 mA		@12V
Input Connector	SMA female		SMA female
Output Connectors	SMA	4 off	PCB pads option
	SMA female	Optional 5 th	SMA female
Power Connector	PCB pads		2.1 DC Jack When boxed
Indicators	Power LED		green
Enclosure (Option)	Aluminium Clam Shell		
	80 x 50 x 20 mm		L x W x D